

1000-BQ2/128

HOT HOLDING BANQUET CARTS



- HALO HEAT . . . a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life.
- Close temperature tolerance and even heat application provides even heat from top to bottom – side to side.
- Holds preplated food fresh, flavorful, and hot.
- No moisture pans, water or canned heat needed.
- Designed to adapt to any type of banquet holding:
 - Covered plates, stacked
 - Covered or uncovered plate carriers
 - Accepts trays for banquet service
 - Additional shelves for full-size and half-size pans (gastronorm pans)
- Dutch doors designed to keep heat in the top portion of the cabinet while removing plates from the bottom.
- Non-magnetic stainless steel interior resists corrosion.
- Full perimeter, wall-friendly bumper, transport handles, and heavy duty casters.
- Adjustable, electronic thermostat with digital display, to monitor inside air temperature.


Stainless steel exterior with two (2) dutch doors and a horizontal transport handle on each end of the cart. Cabinet is controlled with an ON/OFF power switch, adjustable, electronic thermostat which includes a heat indicator light, temperature set button, and temperature increase and decrease buttons. The thermostat has a temperature range of 200°F (93°C) to 60°F (16°C) and includes a digital display indicating the air temperature within the cabinet. Four (4) chrome plated wire shelves are included. A full-perimeter, wall-friendly bumper is included, along with four (4) 6" (152mm) heavy duty casters, 2 rigid and 2 swivel with brake.

Flexible choice of preplated meal service: This banquet cart will also hold covered meals without plate carriers. Additional shelves will equip cart to hold preplated meals without covers, trays, and bulk food items in pans.

MODEL 1000-BQ2/128: Mobile banquet cart with dutch doors with capacity of 128 meals (10" covered plates)

ADDITIONAL FEATURES & OPTIONS


- Plate Carriers
 - Uncovered "P" carriers
 - Covered "C" carriers
 - Uncovered "EP" carriers
 - Covered "EC" carriers



*Plate covers are not furnished. Plate carriers are optional.
Since plates and plate covers vary in size, cabinet may not hold maximum quantity of meals specified.*

1000-BQ2/128

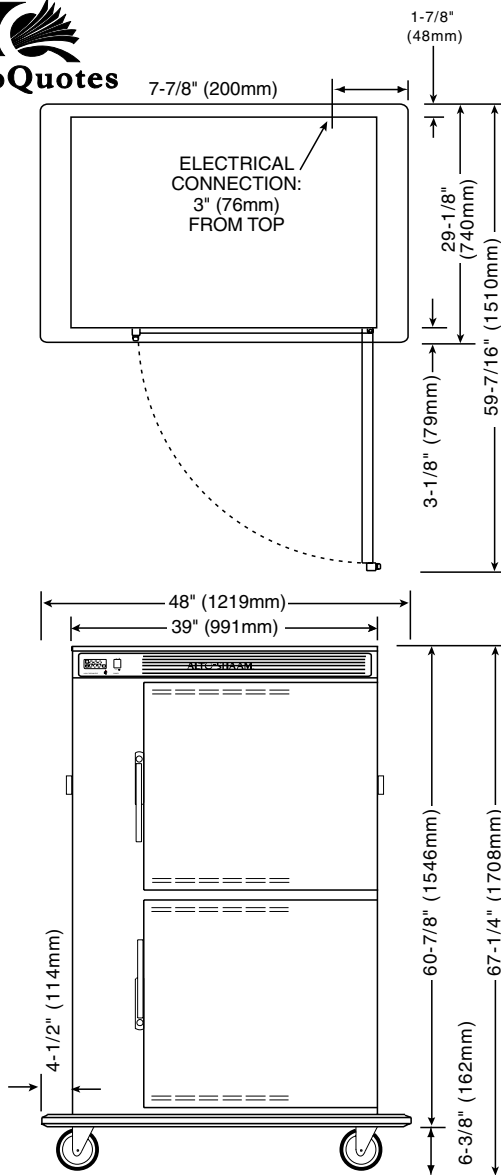


HOT HOLDING BANQUET CARTS



DIMENSIONS: H x W x D

EXTERIOR:	67-1/4" x 48" x 29-1/8" (1708mm x 1219mm x 740mm)
INTERIOR PER DOOR OPENING:	25-1/4" x 35-1/2" x 24-1/2" (641mm x 901mm x 622mm)

ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG INCLUDED
125	1	50/60	18.4	2.30	 NEMA 5-20P 20A- 125V PLUG
208-240	1	50/60	9.6 ^{max.}	2.30	 NEMA 6-15P 15A - 250V PLUG
230	1	50/60	9.3	2.15	 CEE 7/7 220-230V PLUG

CAPACITY

320 lbs (145 kg) MAXIMUM
VOLUME MAXIMUM: 199.5 QUARTS (253 LITERS)
PLATES: (without plate carriers)
— 10" (254mm) with covers: 128
— 10-3/4" (273mm) with covers: 96
LARGER DIAMETER ITEMS WILL RESULT IN REDUCED PLATE CAPACITIES
PANS: Full-size and half-size pan combinations (per shelf)
— 12" x 20" (530mm x 325mm - GN 1/1): 2
— 12" x 10" (265mm x 325mm - GN 1/2): 4
ADDITIONAL WIRE SHELVES WITH SUPPORT CLIPS WILL ACCOMMODATE VARIOUS COMBINATIONS OF 2-1/2" (65mm), 4" (100mm) OR 6" (150mm) DEEP PANS
SHELF CAPACITY: (per shelf, without covers)
— 10" (254mm) plates: 8
— Shelves maximum: 16
SPACING ON CENTERS 3-5/32" (80mm)

INSTALLATION REQUIREMENTS

Cart must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

CLEARANCE REQUIREMENTS

Full perimeter bumper accommodates all clearance requirements.

WEIGHT

NET	444 lb (202 kg)
SHIP	510 lb (232 kg)
CRATE	76" x 51" x 35"
DIMENSIONS: (H x W x D)	(1930mm x 1295mm x 889mm)
	DOMESTIC SHIPMENTS ONLY

OPTIONS & ACCESSORIES

Plate Carriers, chrome plated (EACH HOLD 4 PREPLATED MEALS)	
<input type="checkbox"/> Uncovered "P" Carriers	DC-2868
Plate dia: 10" (254mm) max. • 7-3/4" (197mm) min. Vertical rung spacing: 2-5/8" (67mm) CAPACITY: 32 CARRIERS, 128 PREPLATED MEALS	
<input type="checkbox"/> Covered "C" Carriers	DC-2869
Plate dia: 9-3/4" (248mm) max. • 7-3/4" (197mm) min. Vertical clearance between top and bottom carrier: 11-5/8" (295mm) CAPACITY: 32 CARRIERS, 128 PREPLATED MEALS	
<input type="checkbox"/> Shelf & Shelf Supports (for each extra shelf)	1061/11533

Plate Carriers, chrome plated (EACH HOLD 4 PREPLATED MEALS)	
<input type="checkbox"/> Uncovered "EP" Carriers	DC-23580
Plate dia: 12-1/2" (318mm) max. • 9-1/2" (241mm) min. Vertical rung spacing: 2-5/8" (67mm) CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS	
<input type="checkbox"/> Covered "EC" Carriers	DC-23676
Plate dia: 12-1/2" (318mm) max. • 9-1/2" (241mm) min. Vertical clearance between top and bottom carrier: 11-5/8" (295mm) CAPACITY: 24 CARRIERS, 96 PREPLATED MEALS	
<input type="checkbox"/> Wire Shelf, chrome plated	SH-22727